

Trax Shelf Surface - #2086



6W/M





353lm/m



2700K




Diffused

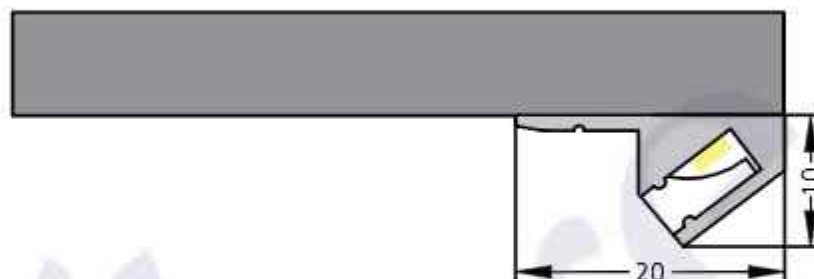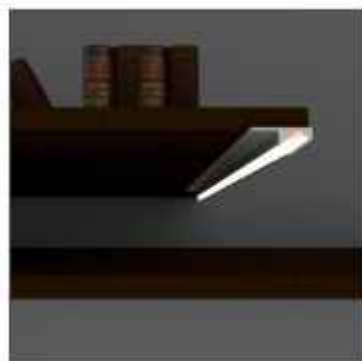

Photometric Data*

Light source	LED - Low Power	Light output ratio	58%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	353lm/m	Color rendering index (R9)	>50
Source lumens	606lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	58.93lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

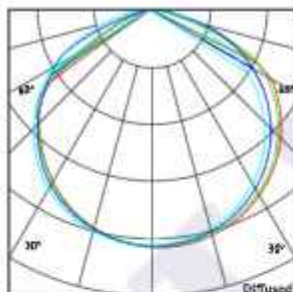


Technical Data*

Mounting detail	Shelf Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs

Hue Bin vs Rf Graph

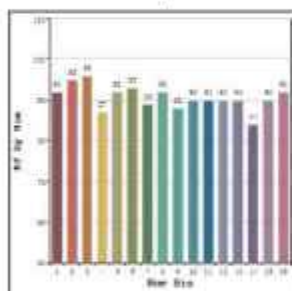

Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Body Finish

- Matt Black
- Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Shelf Surface - #2086



6W/M





363lm/m



3000K




Diffused

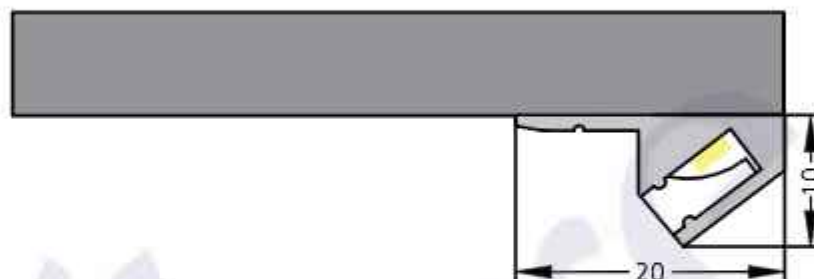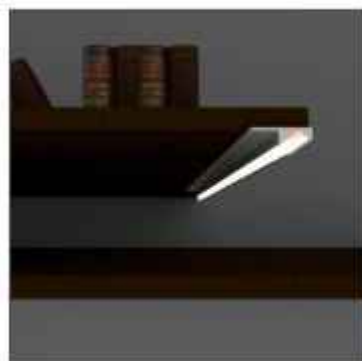

Photometric Data*

Light source	LED - Low Power	Light output ratio	58%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	363lm/m	Color rendering index (R9)	>50
Source lumens	618lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	60.63lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

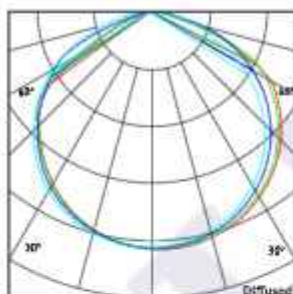


Technical Data*

Mounting detail	Shelf Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

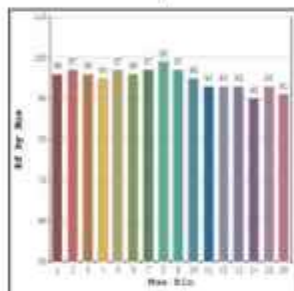


Color Vector Graph



Spectrum vs Wavelength Graph

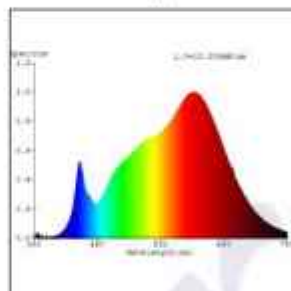

CIE Chromaticity Graph

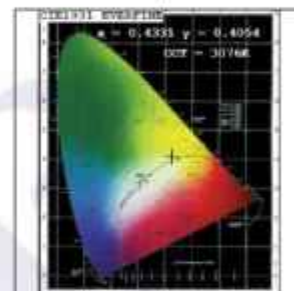

Finish Options

Body Finish

- Matt Black
- Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Shelf Surface - #2086



6W/M





374lm/m



4000K




Diffused

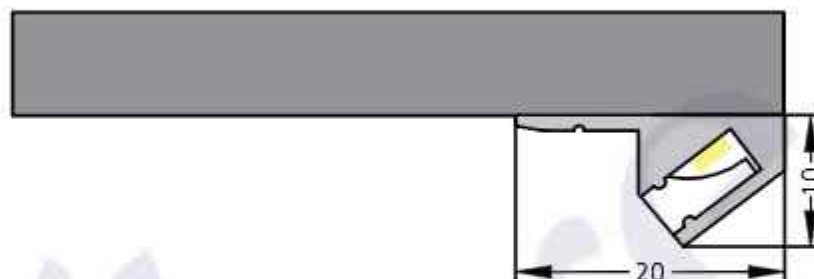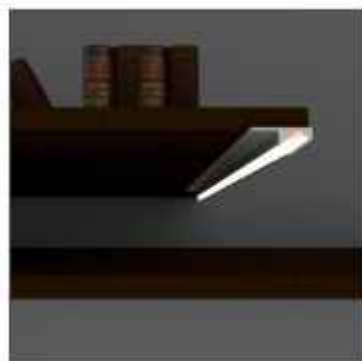

Photometric Data*

Light source	LED - Low Power	Light output ratio	59%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	374lm/m	Color rendering index (R9)	>50
Source lumens	630lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	62.33lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

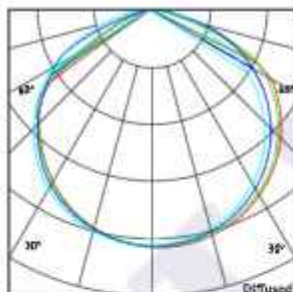


Technical Data*

Mounting detail	Shelf Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

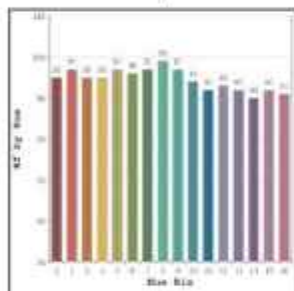


Color Vector Graph



Spectrum vs Wavelength Graph

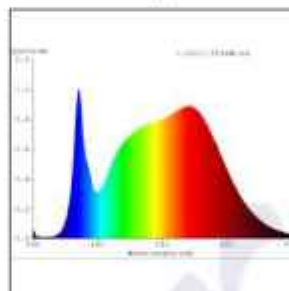

CIE Chromaticity Graph

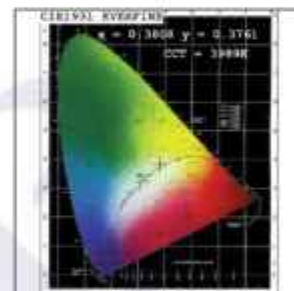

Finish Options

Body Finish

- Matt Black
- Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Shelf Surface - #2086



12W/M





707lm/m



2700K




Diffused

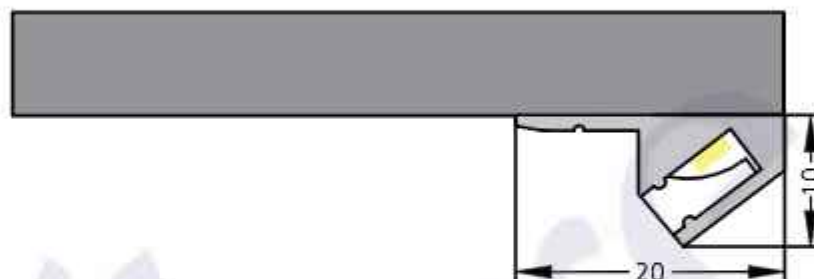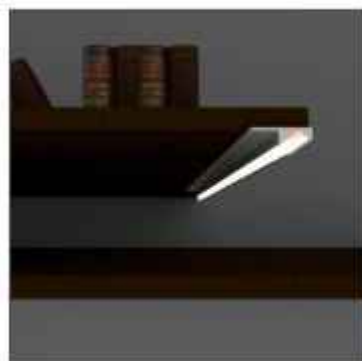

Photometric Data*

Light source	LED - Low Power	Light output ratio	58%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	707lm/m	Color rendering index (R9)	>50
Source lumens	1212lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	58.93lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

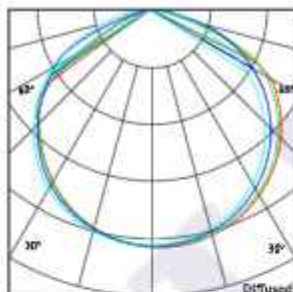


Technical Data*

Mounting detail	Shelf Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

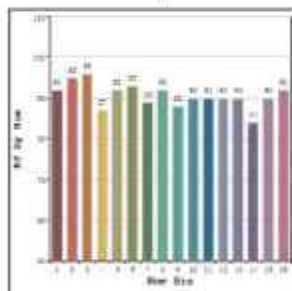


Color Vector Graph



Spectrum vs Wavelength Graph

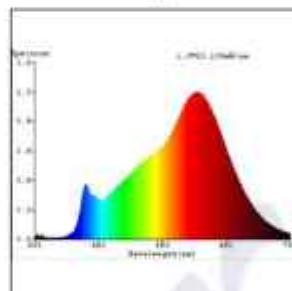

CIE Chromaticity Graph

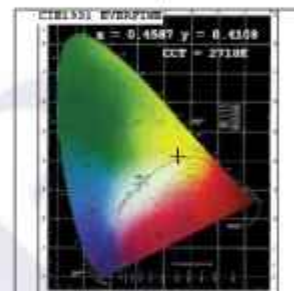

Finish Options

Body Finish

- Matt Black
- Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Shelf Surface - #2086



12W/M





724lm/m



3000K




Diffused

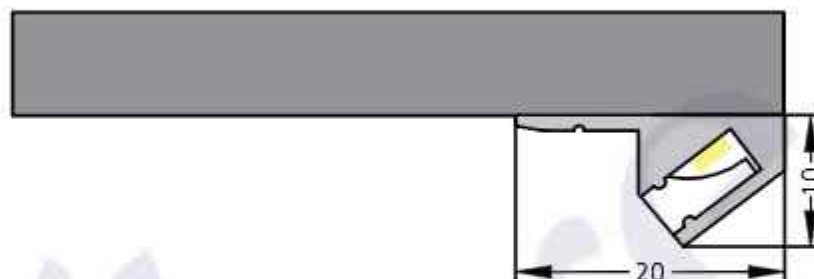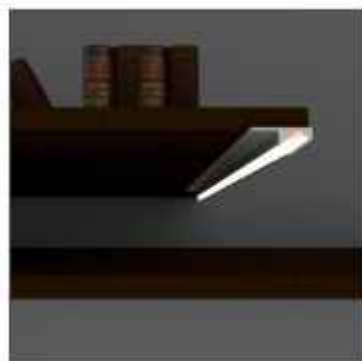

Photometric Data*

Light source	LED - Low Power	Light output ratio	58%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	724lm/m	Color rendering index (R9)	>50
Source lumens	1236lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	60.35lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

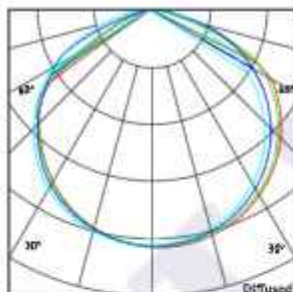


Technical Data*

Mounting detail	Shelf Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

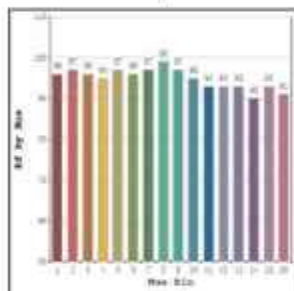


Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph

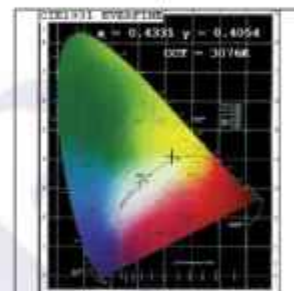

Finish Options

Body Finish

- Matt Black
- Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Shelf Surface - #2086



12W/M





744lm/m



4000K




Diffused

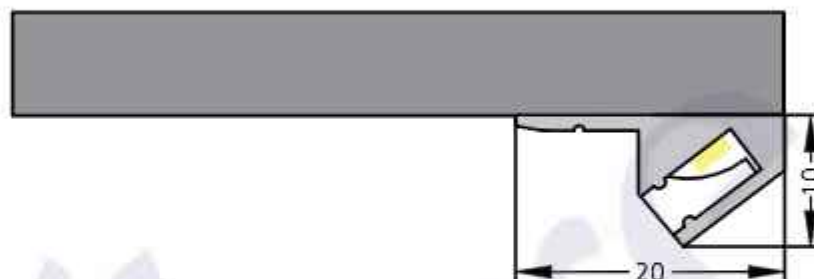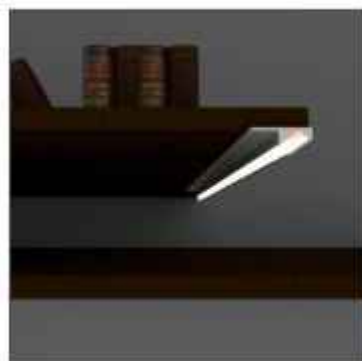

Photometric Data*

Light source	LED - Low Power	Light output ratio	59%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	744lm/m	Color rendering index (R9)	>50
Source lumens	1260lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	62.05lm/W	Operating temperature	-20°C to +50°C
Beam angle	Diffused	Light distribution	Diffused

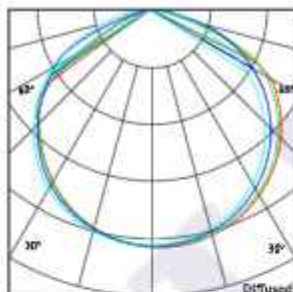


Technical Data*

Mounting detail	Shelf Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

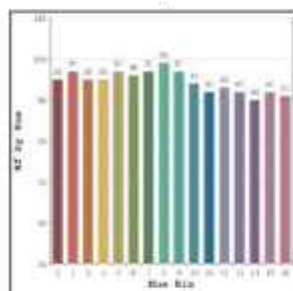


Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph

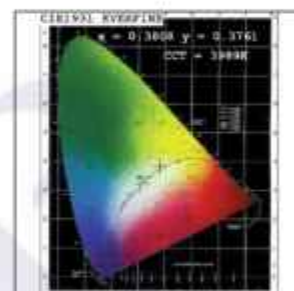

Finish Options

Body Finish

- Matt Black
- Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.