

Trax Wash Lens - #2062



6W/M





503lm/m



2700K




15°

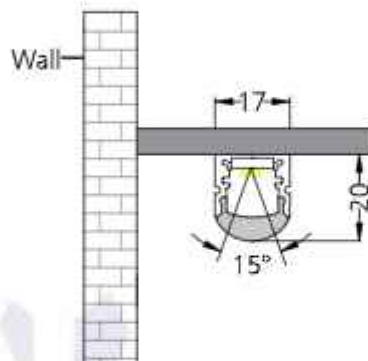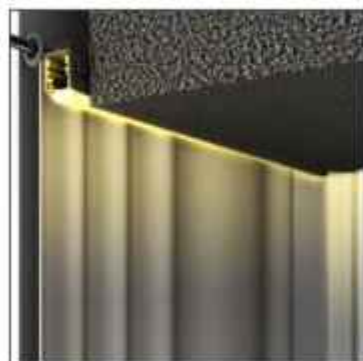

Photometric Data*

Light source	LED - Low Power	Light output ratio	66%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	503lm/m	Color rendering index (R9)	>50
Source lumens	756lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	83.98lm/W	Operating temperature	-20°C to +50°C
Beam angle	15°	Light distribution	Direct - Symmetric

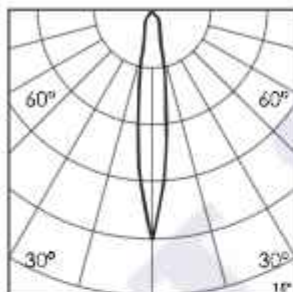

Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs

Hue Bin vs Rf Graph



Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



6W/M





515lm/m



3000K




15°

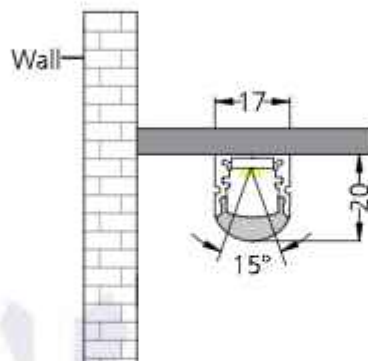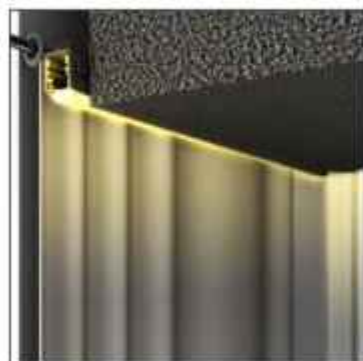

Photometric Data*

Light source	LED - Low Power	Light output ratio	65%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	515lm/m	Color rendering index (R9)	>50
Source lumens	786lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	85.91lm/W	Operating temperature	-20°C to +50°C
Beam angle	15°	Light distribution	Direct - Symmetric

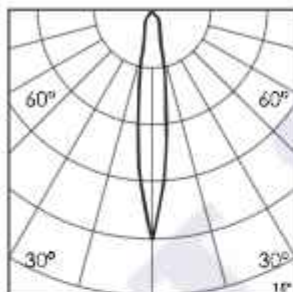


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

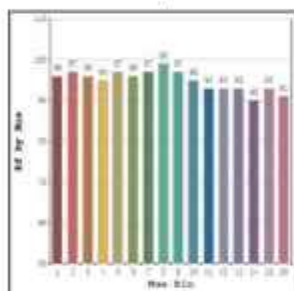


Color Vector Graph



Spectrum vs Wavelength Graph

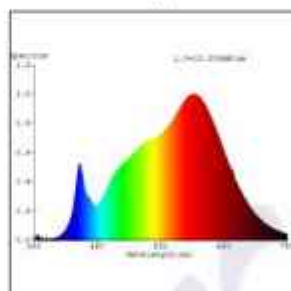

CIE Chromaticity Graph

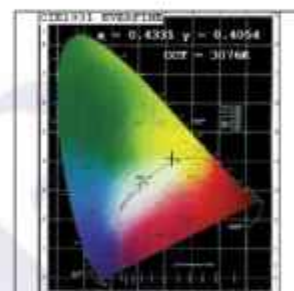

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



6W/M





531lm/m



4000K




15°

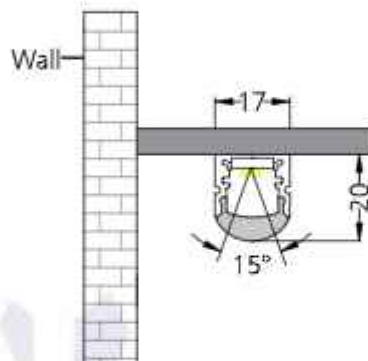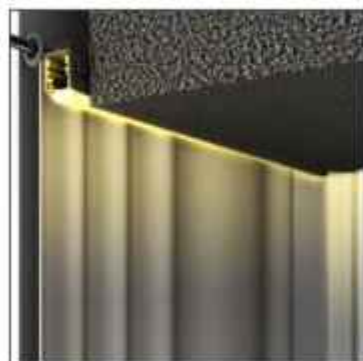

Photometric Data*

Light source	LED - Low Power	Light output ratio	63%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	531lm/m	Color rendering index (R9)	>50
Source lumens	834lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	88.50lm/W	Operating temperature	-20°C to +50°C
Beam angle	15°	Light distribution	Direct - Symmetric

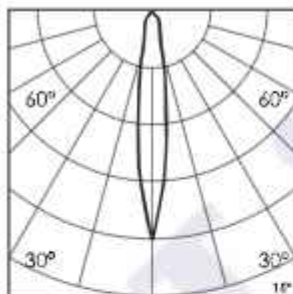


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs

Hue Bin vs Rf Graph

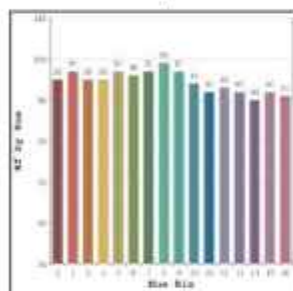


Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph

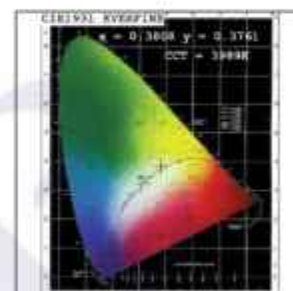

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

Trax Wash Lens - #2062



12W/M





1003lm/m



2700K




15°

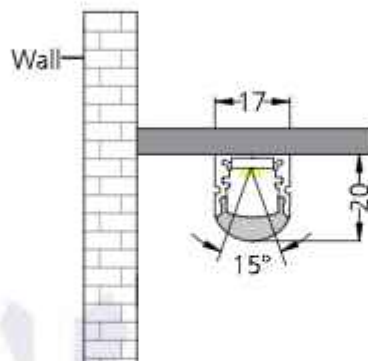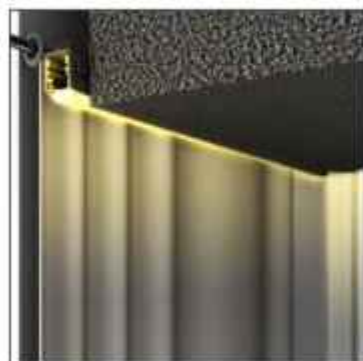

Photometric Data*

Light source	LED - Low Power	Light output ratio	66%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	1003lm/m	Color rendering index (R9)	>50
Source lumens	1512lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	83.65lm/W	Operating temperature	-20°C to +50°C
Beam angle	15°	Light distribution	Direct - Symmetric

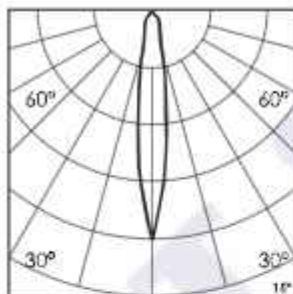

Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph

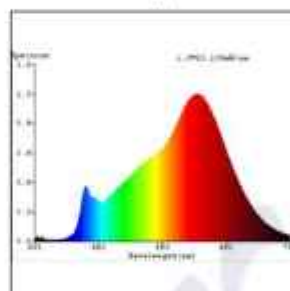

CIE Chromaticity Graph

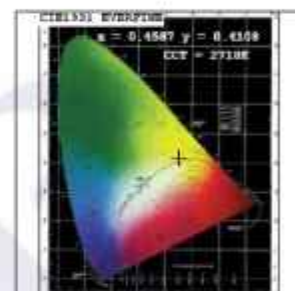

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



12W/M





1027lm/m



3000K




15°

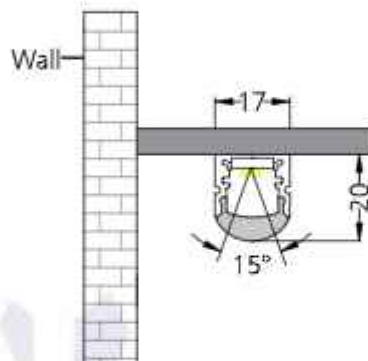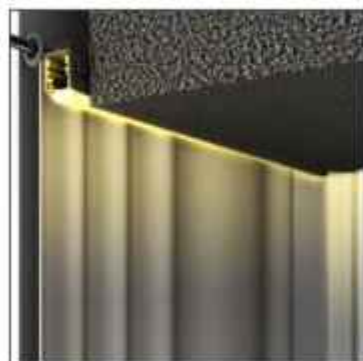

Photometric Data*

Light source	LED - Low Power	Light output ratio	65%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	1027lm/m	Color rendering index (R9)	>50
Source lumens	1572lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	85.59lm/W	Operating temperature	-20°C to +50°C
Beam angle	15°	Light distribution	Direct - Symmetric

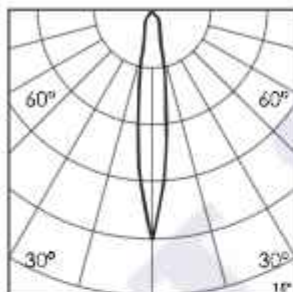


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

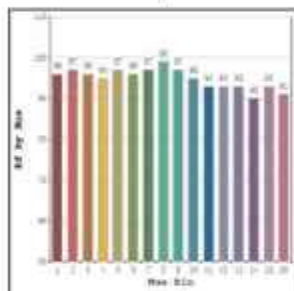


Color Vector Graph



Spectrum vs Wavelength Graph

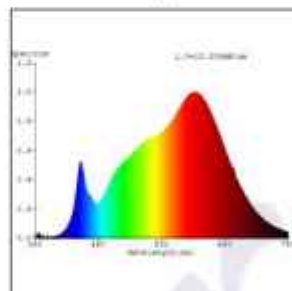

CIE Chromaticity Graph

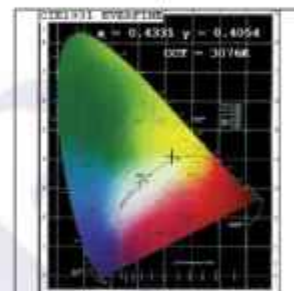

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



12W/M





1058lm/m



4000K




15°

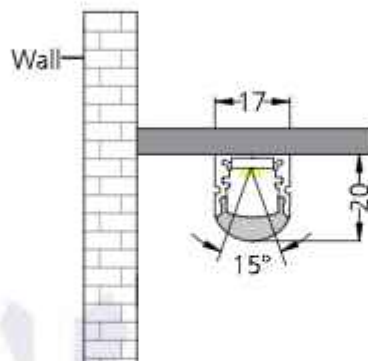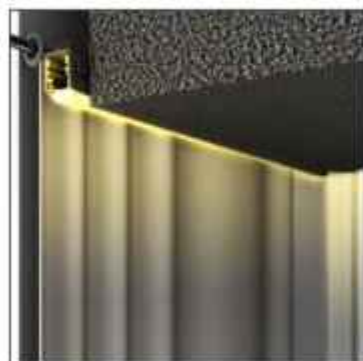

Photometric Data*

Light source	LED - Low Power	Light output ratio	63%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	1058lm/m	Color rendering index (R9)	>50
Source lumens	1668lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	88.17lm/W	Operating temperature	-20°C to +50°C
Beam angle	15°	Light distribution	Direct - Symmetric

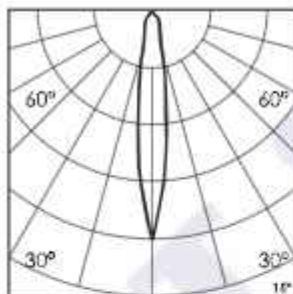


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

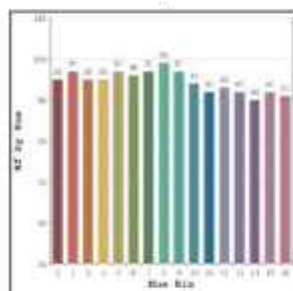


Color Vector Graph



Spectrum vs Wavelength Graph

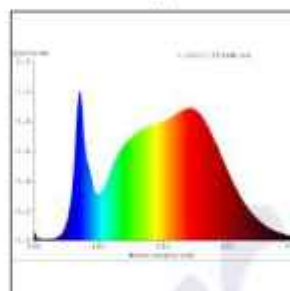

CIE Chromaticity Graph

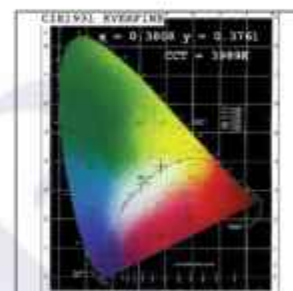

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



24W/M





2011lm/m



2700K




15°

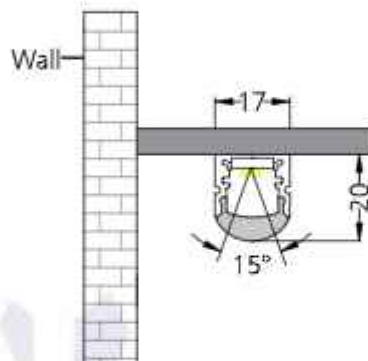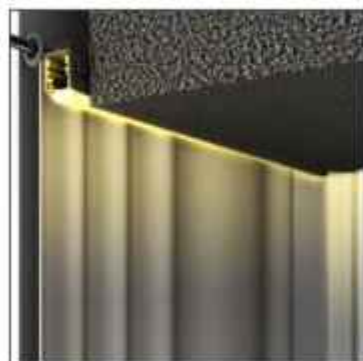

Photometric Data*

Light source	LED - Low Power	Light output ratio	66%
Power (W)	24W/M	Color rendering index (Ra)	>92
Delivered lumens	2011lm/m	Color rendering index (R9)	>50
Source lumens	3024lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	83.81lm/W	Operating temperature	-20°C to +50°C
Beam angle	15°	Light distribution	Direct - Symmetric

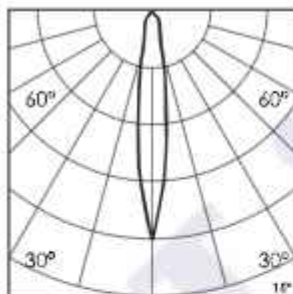

Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs

Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph

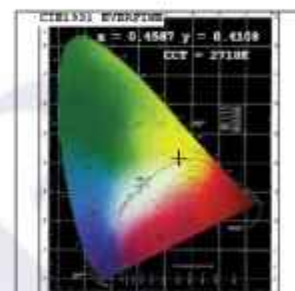

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



24W/M





2062lm/m



3000K




15°

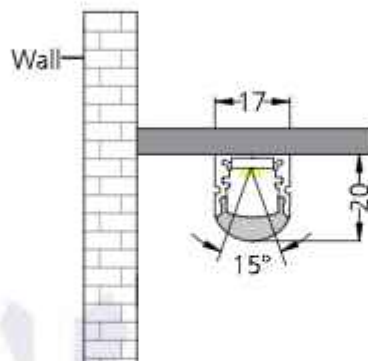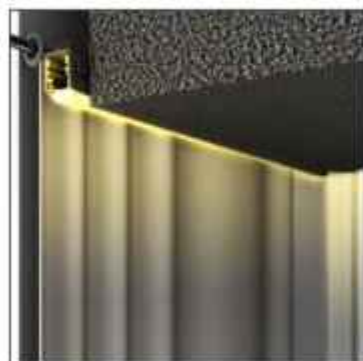

Photometric Data*

Light source	LED - Low Power	Light output ratio	65%
Power (W)	24W/M	Color rendering index (Ra)	>92
Delivered lumens	2062lm/m	Color rendering index (R9)	>50
Source lumens	3144lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	85.91lm/W	Operating temperature	-20°C to +50°C
Beam angle	15°	Light distribution	Direct - Symmetric

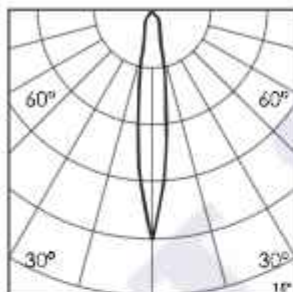


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

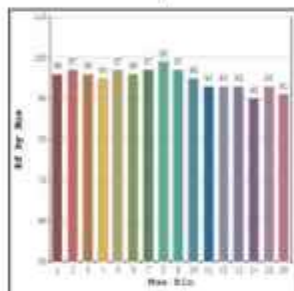


Color Vector Graph



Spectrum vs Wavelength Graph

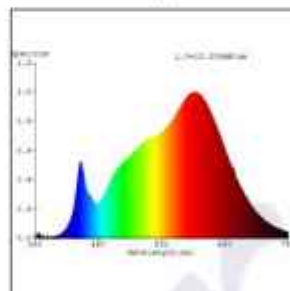

CIE Chromaticity Graph

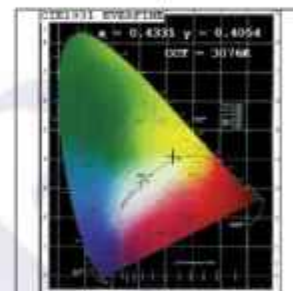

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



24W/M





2124lm/m



4000K




15°

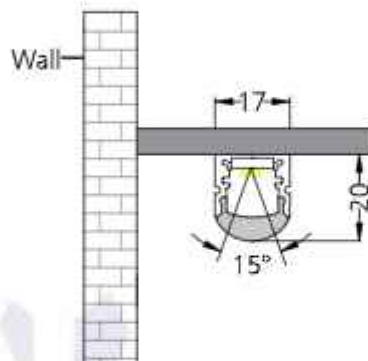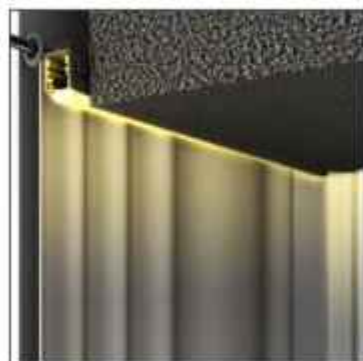

Photometric Data*

Light source	LED - Low Power	Light output ratio	63%
Power (W)	24W/M	Color rendering index (Ra)	>92
Delivered lumens	2124lm/m	Color rendering index (R9)	>50
Source lumens	3336lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	88.50lm/W	Operating temperature	-20°C to +50°C
Beam angle	15°	Light distribution	Direct - Symmetric

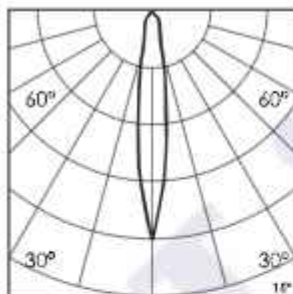


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

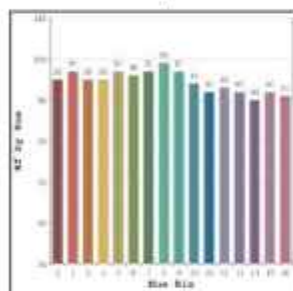


Color Vector Graph



Spectrum vs Wavelength Graph

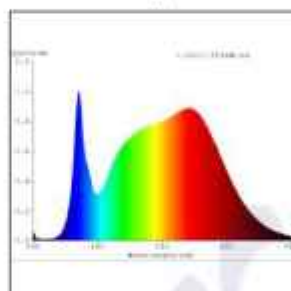

CIE Chromaticity Graph

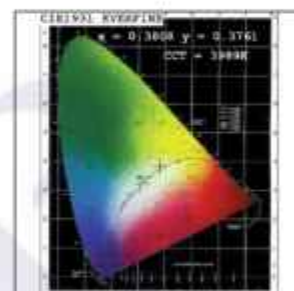

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

Trax Wash Lens - #2062



20W/M




1682lm/m to
1771lm/m



2700K to
6500K




15°

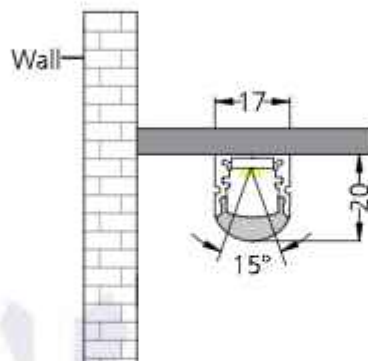

Photometric Data*

Light source	LED - Low Power	Light output ratio	67%
Power (W)	20W/M	Color rendering index (Ra)	>92
Delivered lumens	1682lm/m to 1771lm/m	Color rendering index (R9)	>50
Source lumens	2520lm/m to 2640lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K to 6500K	LED life	L90 B10 Tj75°C
Luminaire efficacy	84.10lm/W to 88.56lm/W	Operating temperature	-20°C to +50°C
Beam angle	15°	Light distribution	Direct - Symmetric

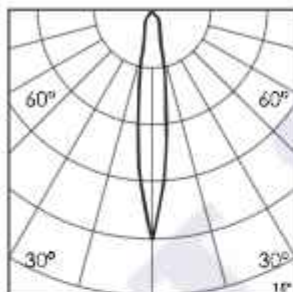

Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph







Color Vector Graph



Spectrum vs Wavelength Graph

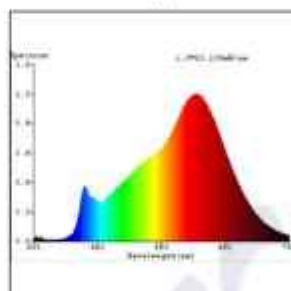

CIE Chromaticity Graph

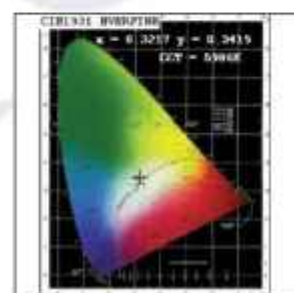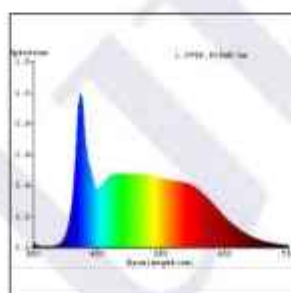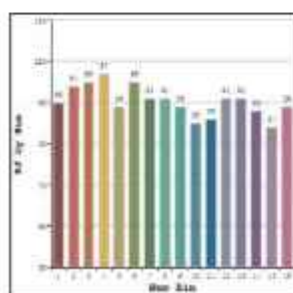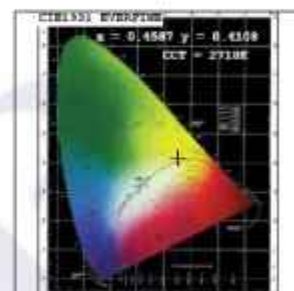

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



6W/M





514lm/m



2700K




30°

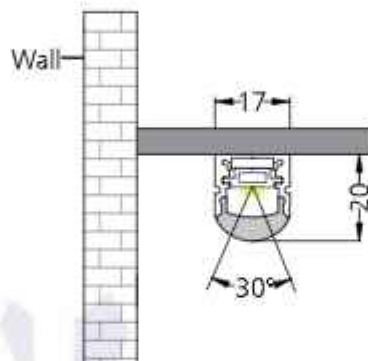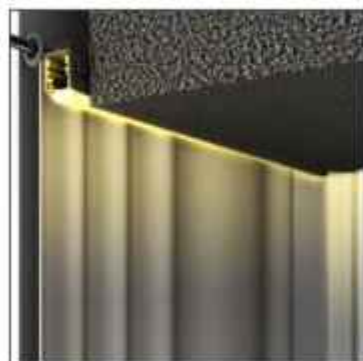

Photometric Data*

Light source	LED - Low Power	Light output ratio	68%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	514lm/m	Color rendering index (R9)	>50
Source lumens	756lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	85.73lm/W	Operating temperature	-20°C to +50°C
Beam angle	30°	Light distribution	Direct - Symmetric

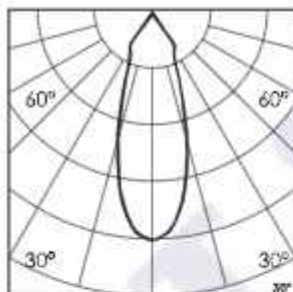

Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs

Hue Bin vs Rf Graph



Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



6W/M





526lm/m



3000K




30°

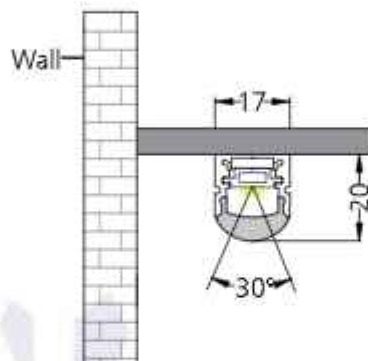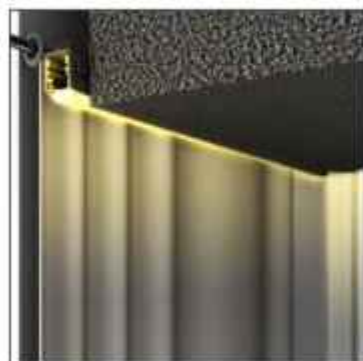

Photometric Data*

Light source	LED - Low Power	Light output ratio	66%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	526lm/m	Color rendering index (R9)	>50
Source lumens	786lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	87.73lm/W	Operating temperature	-20°C to +50°C
Beam angle	30°	Light distribution	Direct - Symmetric

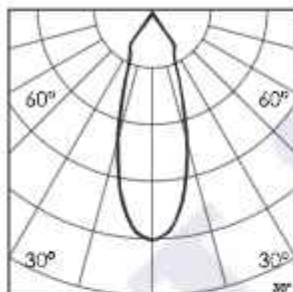


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

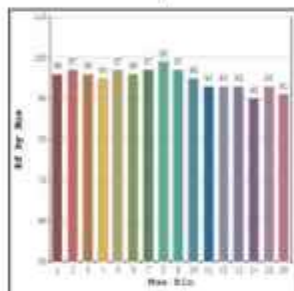


Color Vector Graph



Spectrum vs Wavelength Graph

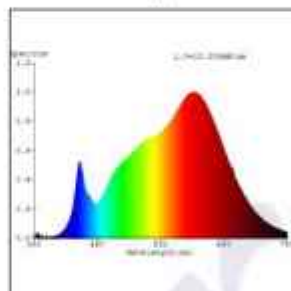

CIE Chromaticity Graph

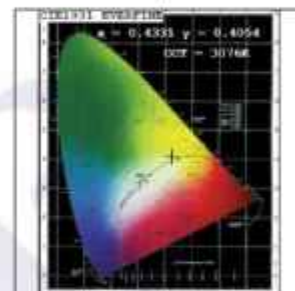

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



6W/M





542lm/m



4000K




30°

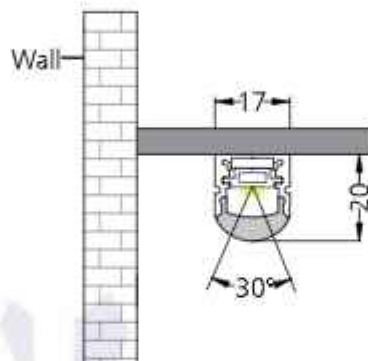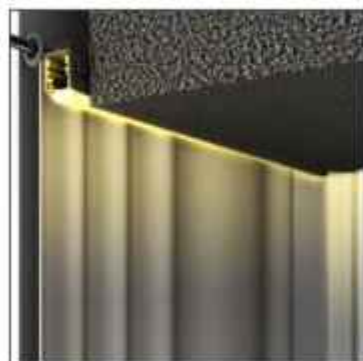

Photometric Data*

Light source	LED - Low Power	Light output ratio	64%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	542lm/m	Color rendering index (R9)	>50
Source lumens	834lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	90.34lm/W	Operating temperature	-20°C to +50°C
Beam angle	30°	Light distribution	Direct - Symmetric

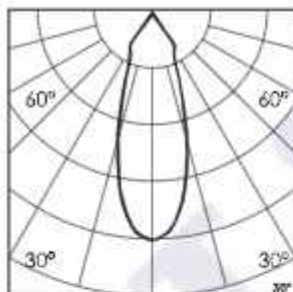


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs

Hue Bin vs Rf Graph

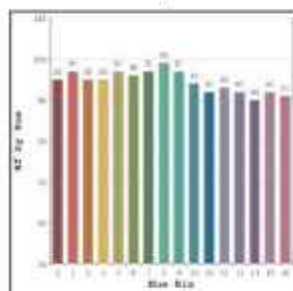


Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph

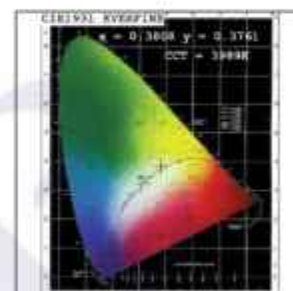

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



12W/M





1024lm/m



2700K




30°

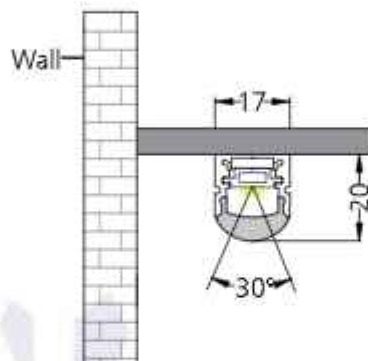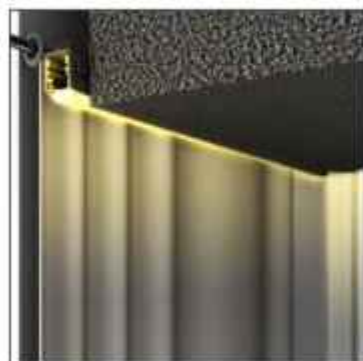

Photometric Data*

Light source	LED - Low Power	Light output ratio	67%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	1024lm/m	Color rendering index (R9)	>50
Source lumens	1512lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	85lm/W	Operating temperature	-20°C to +50°C
Beam angle	30°	Light distribution	Direct - Symmetric

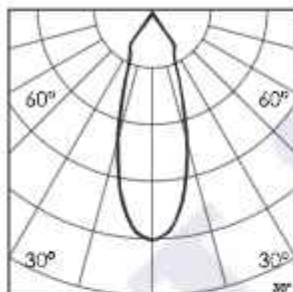


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

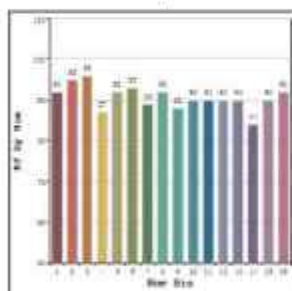


Color Vector Graph



Spectrum vs Wavelength Graph

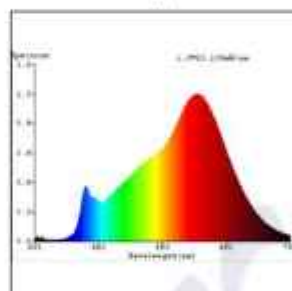

CIE Chromaticity Graph

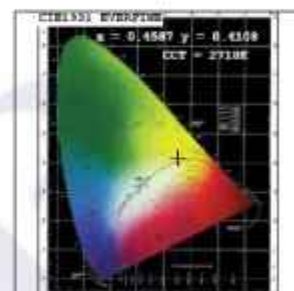

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



12W/M





1048lm/m



3000K




30°

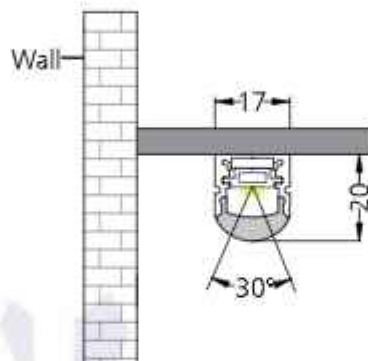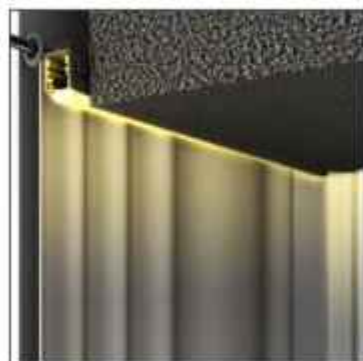

Photometric Data*

Light source	LED - Low Power	Light output ratio	66%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	1048lm/m	Color rendering index (R9)	>50
Source lumens	1572lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	87.37lm/W	Operating temperature	-20°C to +50°C
Beam angle	30°	Light distribution	Direct - Symmetric

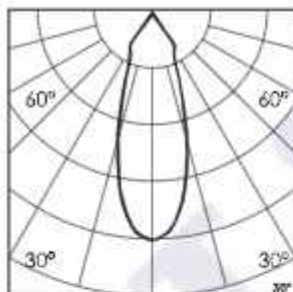


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

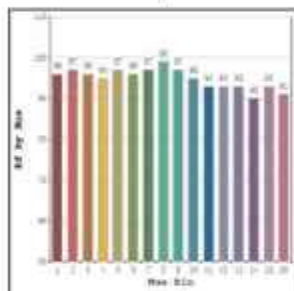


Color Vector Graph



Spectrum vs Wavelength Graph

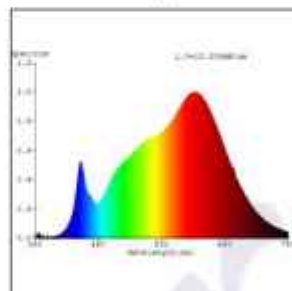

CIE Chromaticity Graph

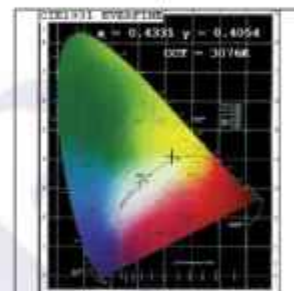

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



12W/M





1080lm/m



4000K




30°

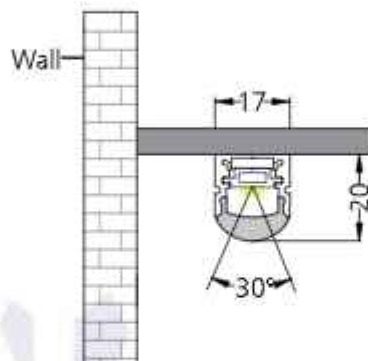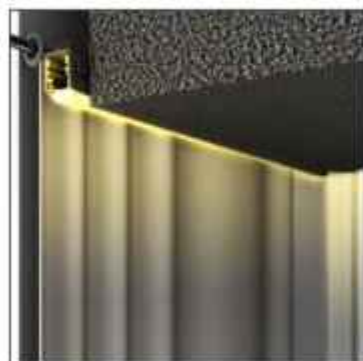

Photometric Data*

Light source	LED - Low Power	Light output ratio	64%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	1080lm/m	Color rendering index (R9)	>50
Source lumens	1668lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	90lm/W	Operating temperature	-20°C to +50°C
Beam angle	30°	Light distribution	Direct - Symmetric

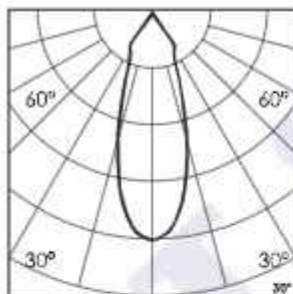


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

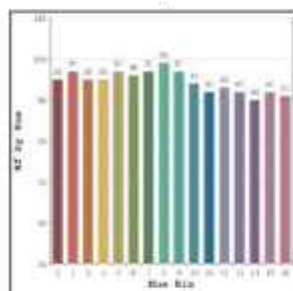


Color Vector Graph



Spectrum vs Wavelength Graph

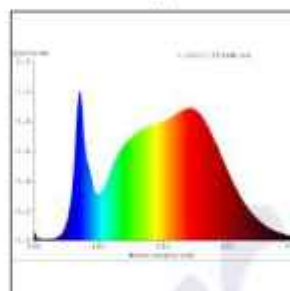

CIE Chromaticity Graph

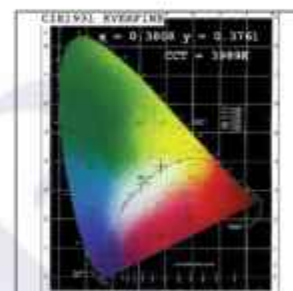

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



24W/M





2053lm/m



2700K




30°

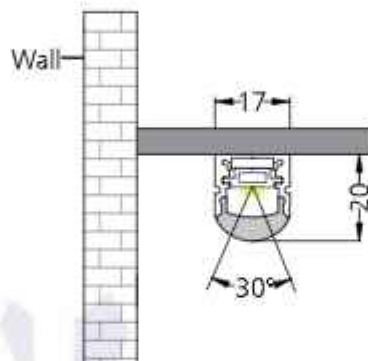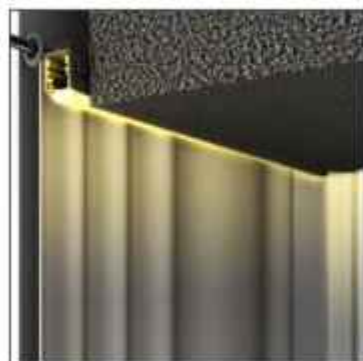

Photometric Data*

Light source	LED - Low Power	Light output ratio	67%
Power (W)	24W/M	Color rendering index (Ra)	>92
Delivered lumens	2053lm/m	Color rendering index (R9)	>50
Source lumens	3024lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	85.56lm/W	Operating temperature	-20°C to +50°C
Beam angle	30°	Light distribution	Direct - Symmetric

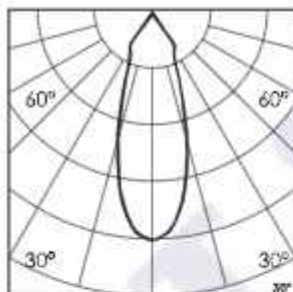


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs

Hue Bin vs Rf Graph

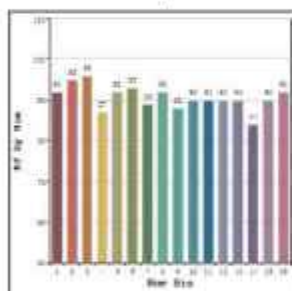

Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



24W/M





2104lm/m



3000K




30°

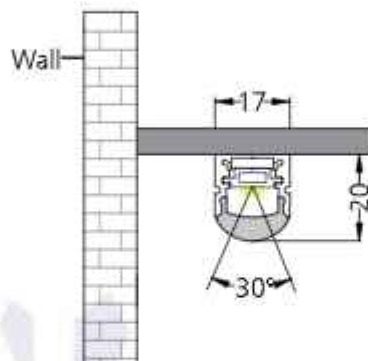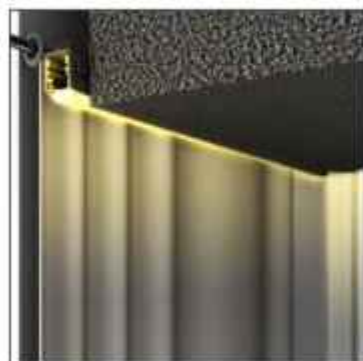

Photometric Data*

Light source	LED - Low Power	Light output ratio	66%
Power (W)	24W/M	Color rendering index (Ra)	>92
Delivered lumens	2104lm/m	Color rendering index (R9)	>50
Source lumens	3144lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	87.70lm/W	Operating temperature	-20°C to +50°C
Beam angle	30°	Light distribution	Direct - Symmetric

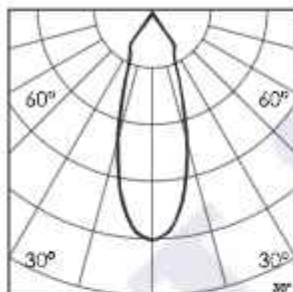


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

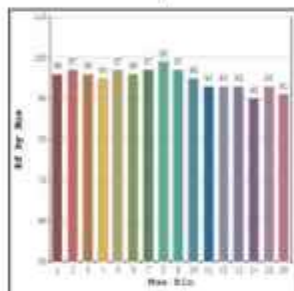


Color Vector Graph



Spectrum vs Wavelength Graph

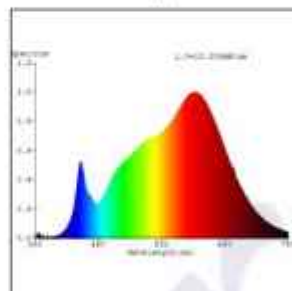

CIE Chromaticity Graph

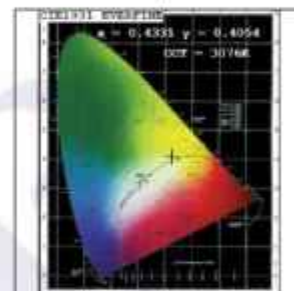

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



24W/M





2168lm/m



4000K




30°

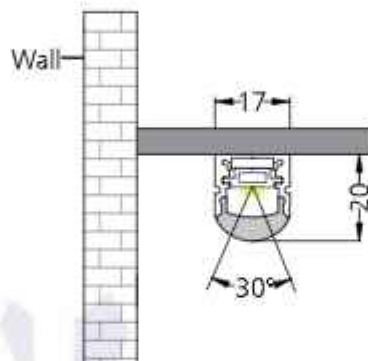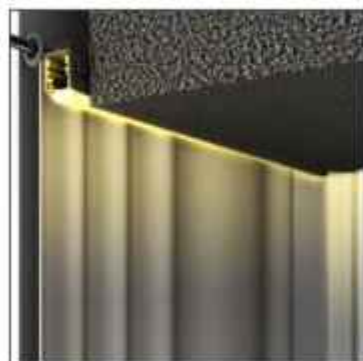

Photometric Data*

Light source	LED - Low Power	Light output ratio	64%
Power (W)	24W/M	Color rendering index (Ra)	>92
Delivered lumens	2168lm/m	Color rendering index (R9)	>50
Source lumens	3336lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	90.34lm/W	Operating temperature	-20°C to +50°C
Beam angle	30°	Light distribution	Direct - Symmetric

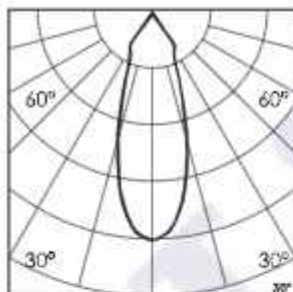


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs

Hue Bin vs Rf Graph

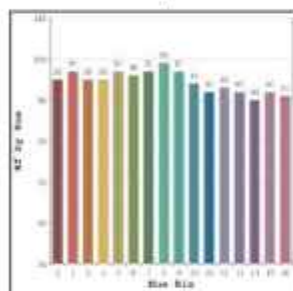


Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph

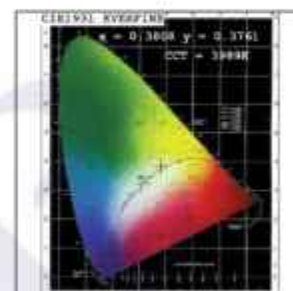

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

Trax Wash Lens - #2062



20W/M





1717lm/m to
1808lm/m



2700K to
6500K




30°

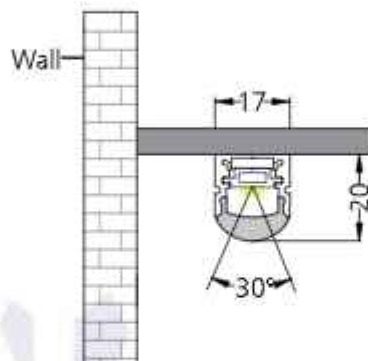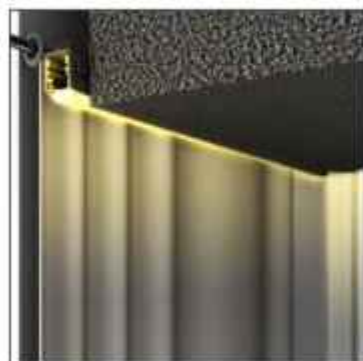

Photometric Data*

Light source	LED - Low Power	Light output ratio	68%
Power (W)	20W/M	Color rendering index (Ra)	>92
Delivered lumens	1717lm/m to 1808lm/m	Color rendering index (R9)	>50
Source lumens	2520lm/m to 2640lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K to 6500K	LED life	L90 B10 Tj75°C
Luminaire efficacy	85.86lm/W to 90.41lm/W	Operating temperature	-20°C to +50°C
Beam angle	30°	Light distribution	Direct - Symmetric

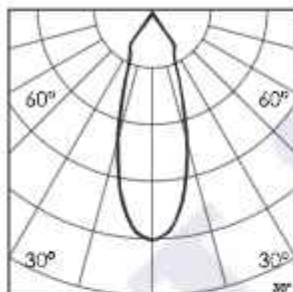

Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph







Color Vector Graph



Spectrum vs Wavelength Graph

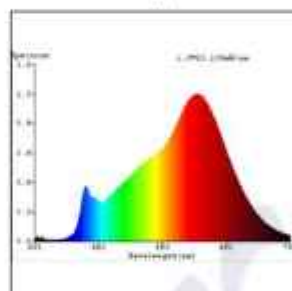

CIE Chromaticity Graph

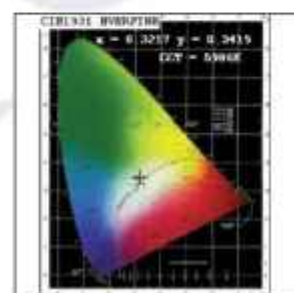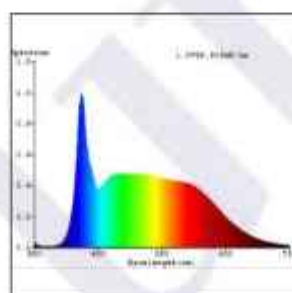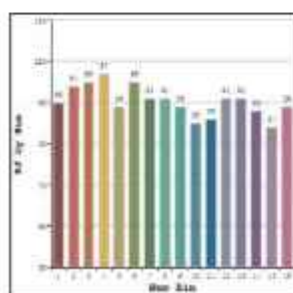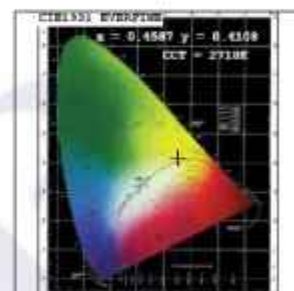

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



6W/M





524lm/m



2700K




60°

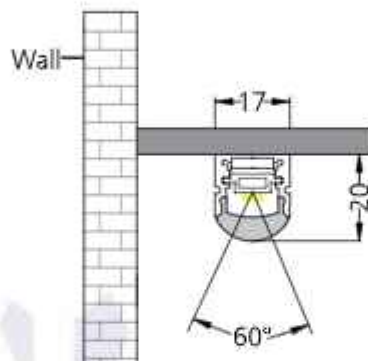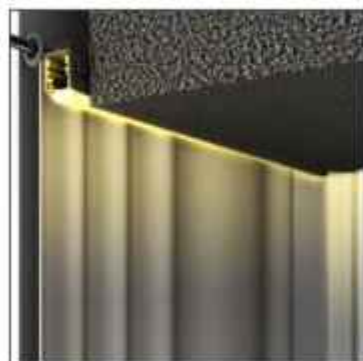

Photometric Data*

Light source	LED - Low Power	Light output ratio	69%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	524lm/m	Color rendering index (R9)	>50
Source lumens	756lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	87.47lm/W	Operating temperature	-20°C to +50°C
Beam angle	60°	Light distribution	Direct - Symmetric

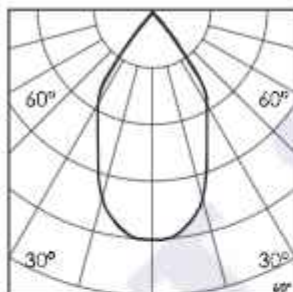

Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs

Hue Bin vs Rf Graph



Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



6W/M





536lm/m



3000K




60°

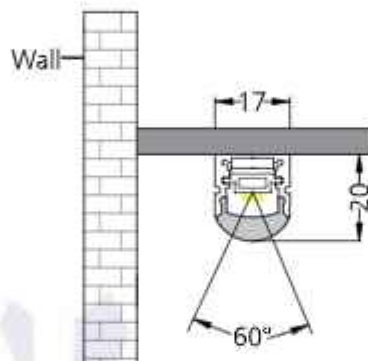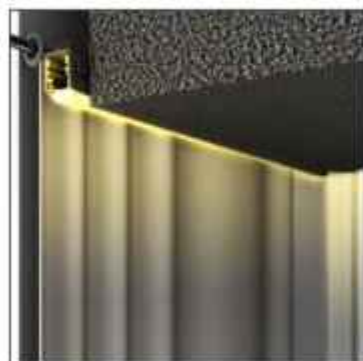

Photometric Data*

Light source	LED - Low Power	Light output ratio	68%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	536lm/m	Color rendering index (R9)	>50
Source lumens	786lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	89.49lm/W	Operating temperature	-20°C to +50°C
Beam angle	60°	Light distribution	Direct - Symmetric

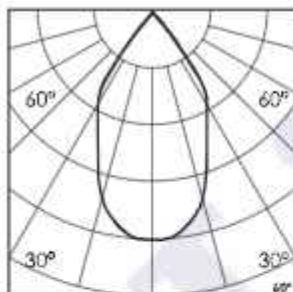


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

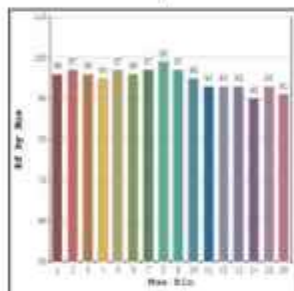


Color Vector Graph



Spectrum vs Wavelength Graph

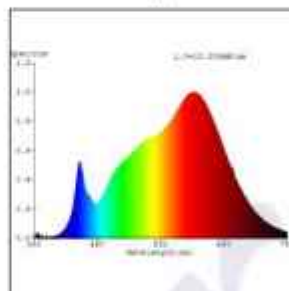

CIE Chromaticity Graph

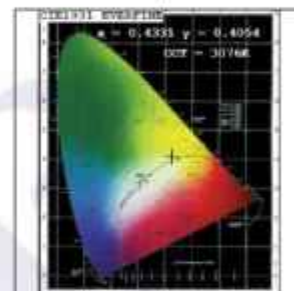

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



6W/M





553lm/m



4000K




60°

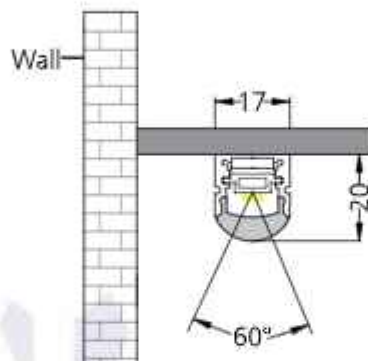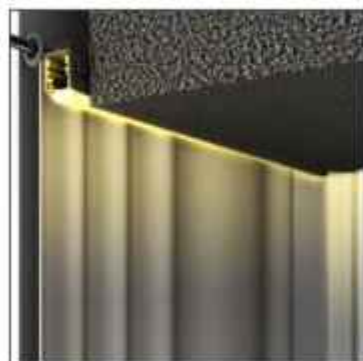

Photometric Data*

Light source	LED - Low Power	Light output ratio	66%
Power (W)	6W/M	Color rendering index (Ra)	>92
Delivered lumens	553lm/m	Color rendering index (R9)	>50
Source lumens	834lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	92.19lm/W	Operating temperature	-20°C to +50°C
Beam angle	60°	Light distribution	Direct - Symmetric

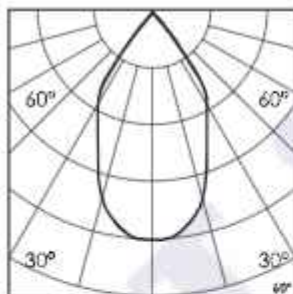


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

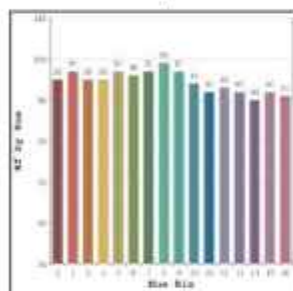


Color Vector Graph



Spectrum vs Wavelength Graph

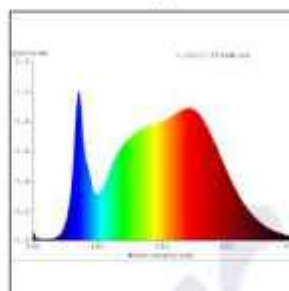

CIE Chromaticity Graph

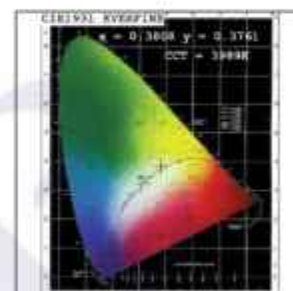

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

Trax Wash Lens - #2062



12W/M





1045lm/m



2700K




60°

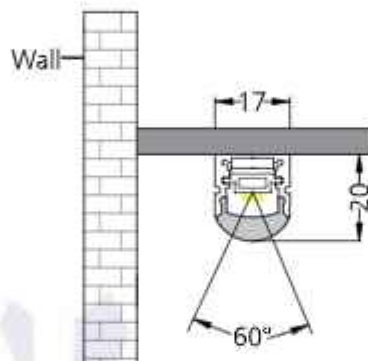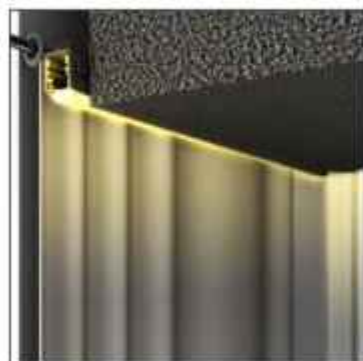

Photometric Data*

Light source	LED - Low Power	Light output ratio	69%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	1045lm/m	Color rendering index (R9)	>50
Source lumens	1512lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	87.14lm/W	Operating temperature	-20°C to +50°C
Beam angle	60°	Light distribution	Direct - Symmetric

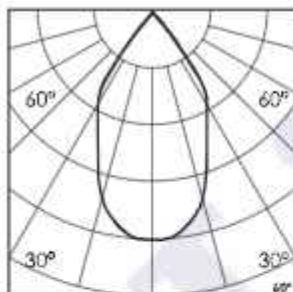

Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph




Color Vector Graph



Spectrum vs Wavelength Graph

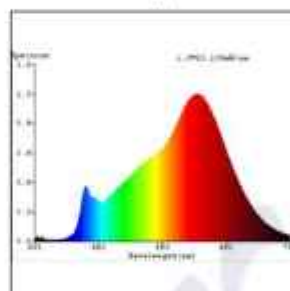

CIE Chromaticity Graph

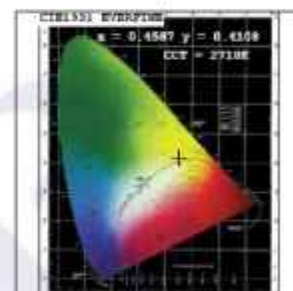

Finish Options

Max Length

- ☐ Matt White
- ☒ Custom RAL Color

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



12W/M





1069lm/m



3000K




60°

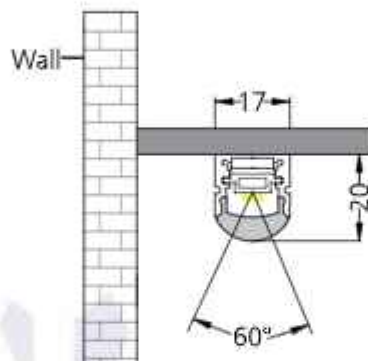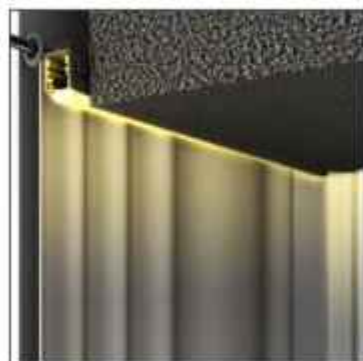

Photometric Data*

Light source	LED - Low Power	Light output ratio	68%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	1069lm/m	Color rendering index (R9)	>50
Source lumens	1572lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	89.16lm/W	Operating temperature	-20°C to +50°C
Beam angle	60°	Light distribution	Direct - Symmetric

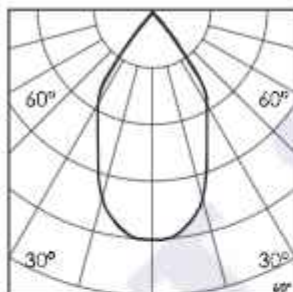


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

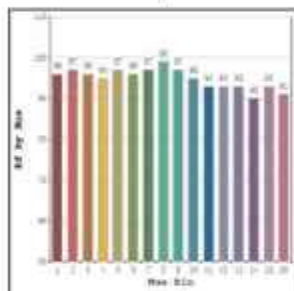


Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph

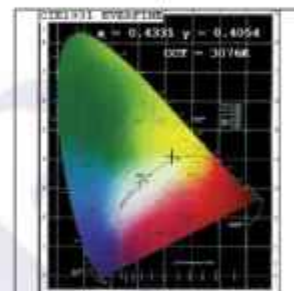

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



12W/M





1102lm/m



4000K




60°

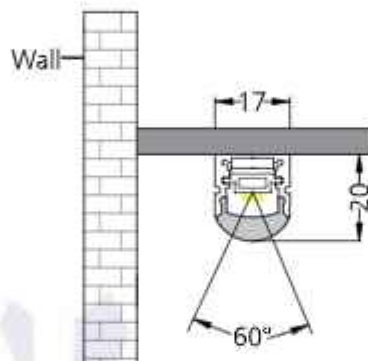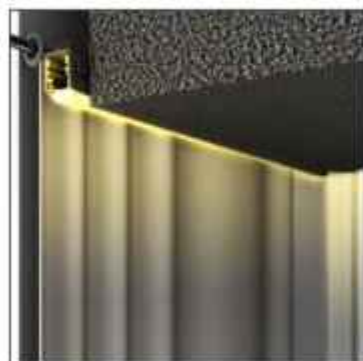

Photometric Data*

Light source	LED - Low Power	Light output ratio	66%
Power (W)	12W/M	Color rendering index (Ra)	>92
Delivered lumens	1102lm/m	Color rendering index (R9)	>50
Source lumens	1668lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	91.85lm/W	Operating temperature	-20°C to +50°C
Beam angle	60°	Light distribution	Direct - Symmetric

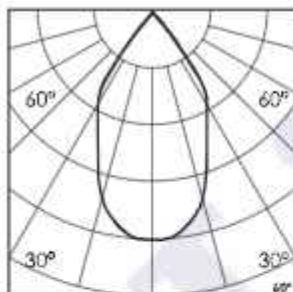


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote


*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

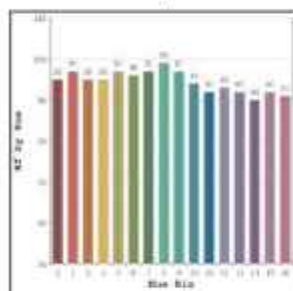


Color Vector Graph



Spectrum vs Wavelength Graph

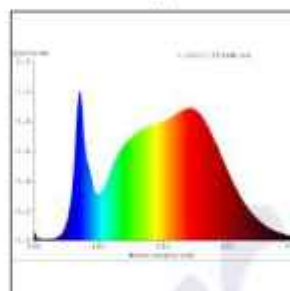

CIE Chromaticity Graph

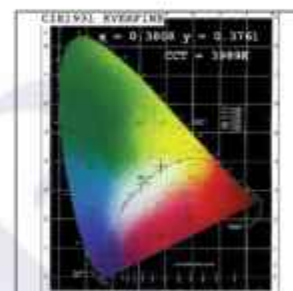

Finish Options

Body Finish

Max Length

- ☐ Matt White
- ☒ Custom RAL Color

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



24W/M





2095lm/m



2700K




60°

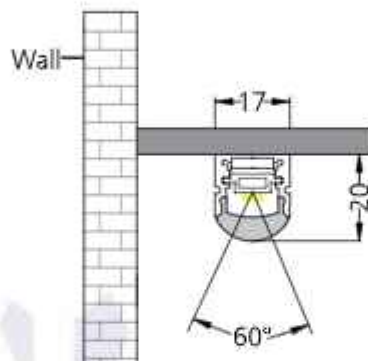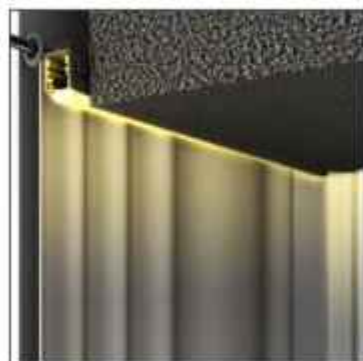

Photometric Data*

Light source	LED - Low Power	Light output ratio	69%
Power (W)	24W/M	Color rendering index (Ra)	>92
Delivered lumens	2095lm/m	Color rendering index (R9)	>50
Source lumens	3024lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K	LED life	L90 B10 Tj75°C
Luminaire efficacy	87.31lm/W	Operating temperature	-20°C to +50°C
Beam angle	60°	Light distribution	Direct - Symmetric

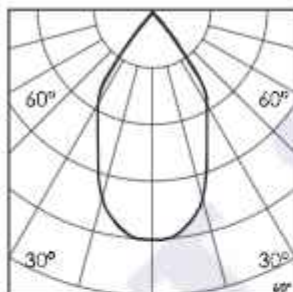

Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs

Hue Bin vs Rf Graph



Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



24W/M





2147lm/m



3000K




60°

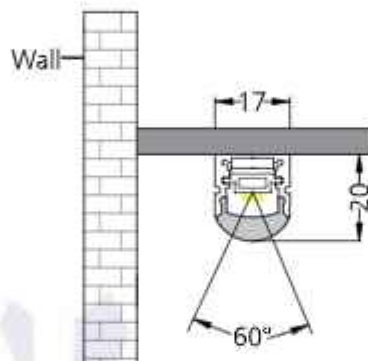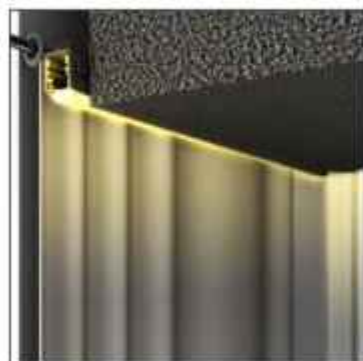

Photometric Data*

Light source	LED - Low Power	Light output ratio	68%
Power (W)	24W/M	Color rendering index (Ra)	>92
Delivered lumens	2147lm/m	Color rendering index (R9)	>50
Source lumens	3144lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	89.49lm/W	Operating temperature	-20°C to +50°C
Beam angle	60°	Light distribution	Direct - Symmetric

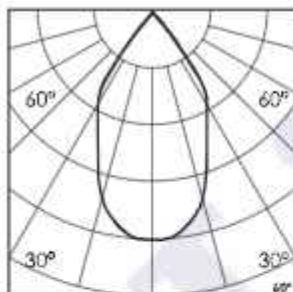


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph

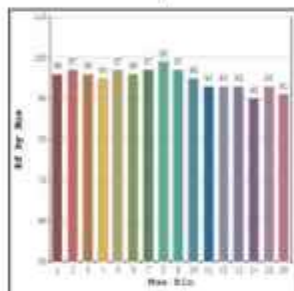


Color Vector Graph



Spectrum vs Wavelength Graph

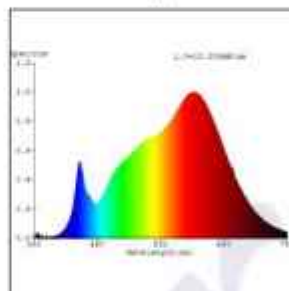

CIE Chromaticity Graph

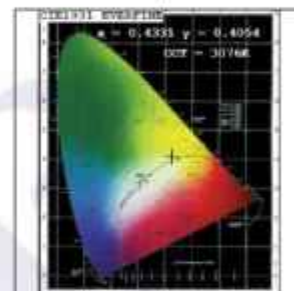

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



24W/M





2212lm/m



4000K




60°

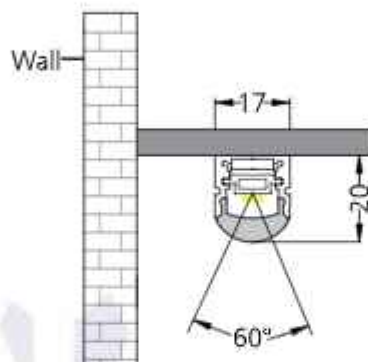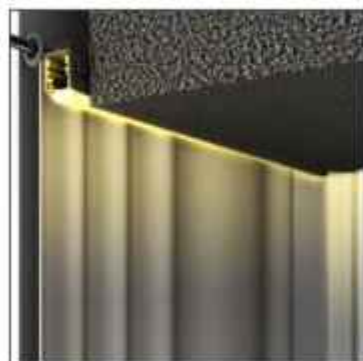

Photometric Data*

Light source	LED - Low Power	Light output ratio	66%
Power (W)	24W/M	Color rendering index (Ra)	>92
Delivered lumens	2212lm/m	Color rendering index (R9)	>50
Source lumens	3336lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	4000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	92.19lm/W	Operating temperature	-20°C to +50°C
Beam angle	60°	Light distribution	Direct - Symmetric

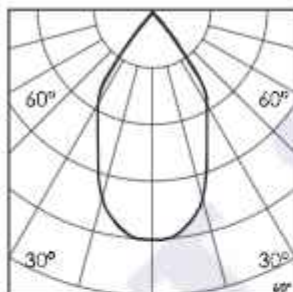


Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs

Hue Bin vs Rf Graph

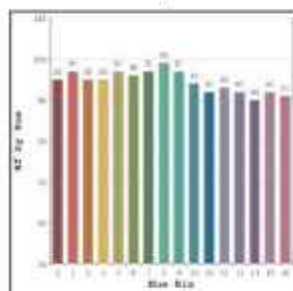


Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph

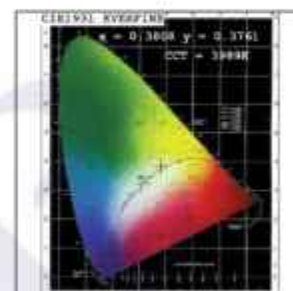

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.

Trax Wash Lens - #2062



20W/M




1752lm/m to
1845lm/m



2700K to
6500K




60°

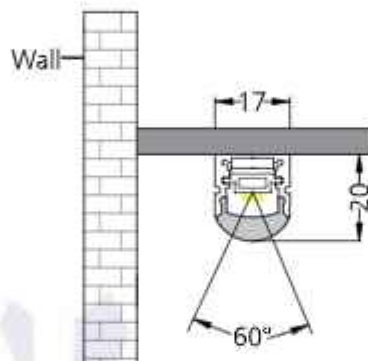

Photometric Data*

Light source	LED - Low Power	Light output ratio	69%
Power (W)	20W/M	Color rendering index (Ra)	>92
Delivered lumens	1752lm/m to 1845lm/m	Color rendering index (R9)	>50
Source lumens	2520lm/m to 2640lm/m	Binning MacAdam	<3 SDCM
Colour temperature (K)	2700K to 6500K	LED life	L90 B10 Tj75°C
Luminaire efficacy	87.61lm/W to 92.25lm/W	Operating temperature	-20°C to +50°C
Beam angle	60°	Light distribution	Direct - Symmetric

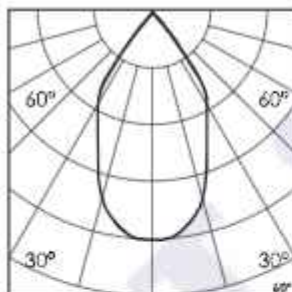

Technical Data*

Mounting detail	Wall Mounted	Safety class	III
Fixing detail	Mounting Clamp	Insulation class	III
Orientation	Fixed	Voltage	AC230V
IP rating	IP20	Forward voltage	DC24V
Glow wire test	850°	Driver	CV - Remote

*Kindly note that the Photometric & Technical data is obtained after the Svelte Strip is installed into the Trax Profile

Photometric Graphs


Hue Bin vs Rf Graph








Color Vector Graph



Spectrum vs Wavelength Graph

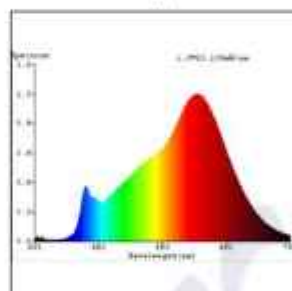

CIE Chromaticity Graph

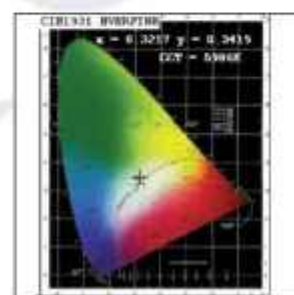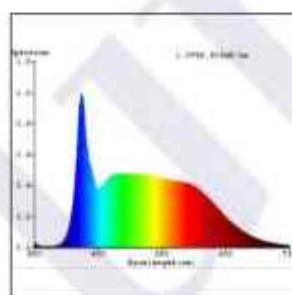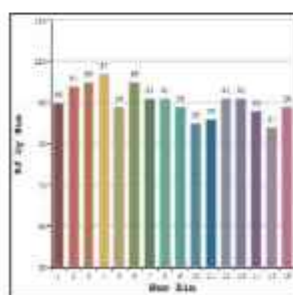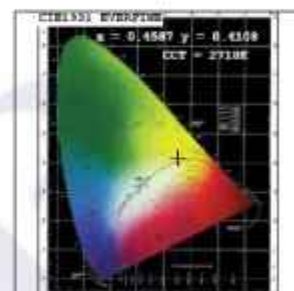

Finish Options

Body Finish

- ☐ Matt White
- ☒ Custom RAL Color

Max Length

5000MM

Dimming Options



Constant Voltage Driver
75w DC24V
Non Dimmable



Constant Voltage Driver
75w DC24V
Triac Dimmable



Constant Voltage Driver
75w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
75w DC24V
Dali Dimmable

L'azure constantly strives to improve our products using the latest technological advancements in the industry.
Due to which the data mentioned in the data sheet is subject to change without prior notice.