

Willow Streak Flat - #3023



12W





470lm



Red



Line Beam

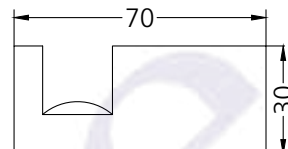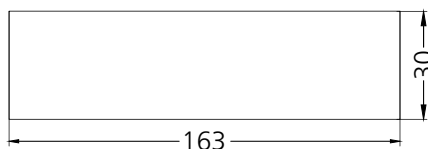

Photometric Data

| | | | |
|------------------------|------------------|-----------------------|----------------|
| Light source | LED - High Power | Beam angle | Line Beam |
| Power (W) | 12W | Light output ratio | 57% |
| Delivered lumens | 470lm | LED life | L90 B10 Tj75°C |
| Source lumens | 816lm | UGR | <19 |
| Colour temperature (K) | Red | Operating temperature | -20°C to +50°C |
| Luminaire efficacy | 39lm/W | Light distribution | Line Beam |



Technical Data

| | | | |
|-------------------|--------------|------------------|----------------|
| Mounting detail | Surface | Product weight | 893gms |
| Fixing detail | Wall Mounted | Safety class | III |
| Orientation | Fixed | Insulation class | III |
| IP rating | IP65 | Voltage | DC24V |
| Glow wire test | 850° | Driver | Remote - DC24V |
| Trim material | NA | | |
| Heatsink material | Diecast alm. | | |

Finish Options

Body Finish

- Matt Grey
- Matt Black
- Custom RAL Color

Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver