

iSkew Niche Midi - #1305



3W





227lm



3000K





10°



Photometric Data

Light source	LED - High Power
Power (W)	3W
Delivered lumens	227lm
Source lumens	336lm
Colour temperature (K)	3000K
Luminaire efficacy	75.66lm/W
Beam angle	10°
Cutoff angle	31°

Light output ratio	67%
Color rendering index (Ra)	>92
Color rendering index (R9)	>50
Binning MacAdam	<3 SDCM
LED life	L90 B10 Tj75°C
UGR	<19
Operating temperature	-20°C to +50°C
Light distribution	Direct - Symmetric

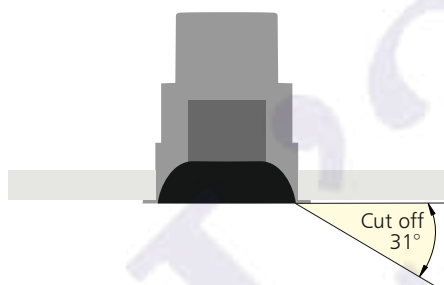

Technical Data

Mounting detail	Ceiling - Recessed 1-25mm
Fixing detail	Dual tension spring
Orientation	Fixed
IP rating	IP20
Glow wire test	850°
Trim material	Diecast alm.
Heatsink material	Diecast alm.

Product weight	41gms
Safety class	III
Insulation class	III
LED current (mA)	600mA
Voltage	AC230V
Forward voltage	DC3V
Driver	CC - Remote

Photometric Graphs

Hue Bin vs Rf Graph



Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Trim Finish

- ☐ Matt White
- ☒ Matt Black
- ☐ Custom RAL Color

Interior Finish

- ☐ Matt White
- ☒ Matt Black

Dimming Options



Constant Current Driver
3w 600mA 220-240V
Non Dimmable



Constant Current Driver
3w 600mA 220-240V
Triac Dimmable



Constant Current Driver
3w 600mA 220-240V
Analog 0-10V / 1-10V Dimmable



Constant Current Driver
3w 600mA 220-240V
Dali Dimmable