

# Kosmos 18 - #2207



9W




595lm



RGB




10x65°

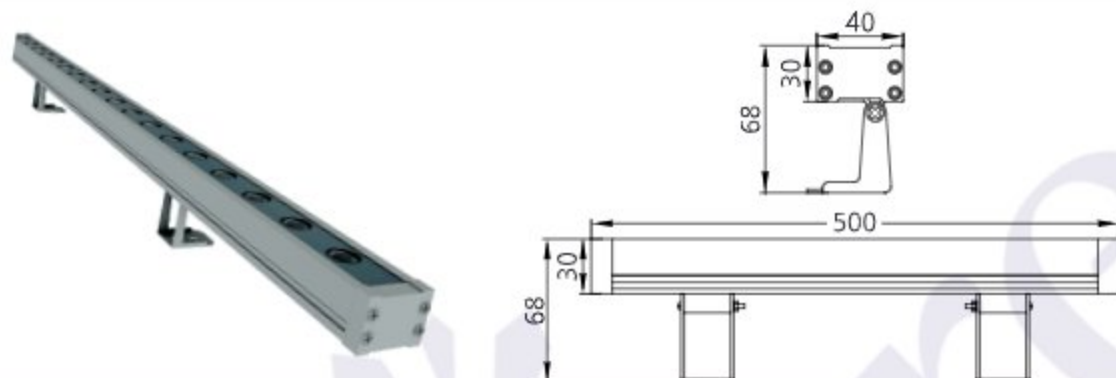

## Photometric Data

|                        |                  |                            |                |
|------------------------|------------------|----------------------------|----------------|
| Light source           | LED - High Power | Light output ratio         | 73%            |
| Power (W)              | 9W               | Color rendering index (Ra) | NA             |
| Delivered lumens       | 595lm            | Color rendering index (R9) | NA             |
| Source lumens          | 810lm            | Binning MacAdam            | <2 SDCM        |
| Colour temperature (K) | RGB              | LED life                   | L90 B10 Tj75°C |
| Luminaire efficacy     | 66.11lm/W        | UGR                        | <19            |
| Beam angle             | 10x65°           | Operating temperature      | -20°C to +50°C |
| Cutoff angle           | NA               | Light distribution         | Grazer         |



## Technical Data

|                   |                    |                      |                  |
|-------------------|--------------------|----------------------|------------------|
| Mounting detail   | Surface Mounted    | Glow wire test       | 850°             |
| Fixing detail     | Mounting Clamp     | Product weight       | 805gms Per 500MM |
| Orientation       | Adjustable         | Safety class         | III              |
| IP rating         | IP65               | Insulation class     | III              |
| IK rating         | IK05               | Driver Input Voltage | AC230V           |
| Trim material     | NA                 | Fixture voltage      | DC24V            |
| Heatsink material | Aluminum Extrusion | Driver               | CV - Remote      |

## Finish Options

### Body Finish

-  Matt Grey
-  Custom RAL Color

### Length

- 500MM
- 1000MM

## Clamp Options



Adj. Clamp

## Dimming Options



Remote DMX Decoder

The DMX Decoder requires a 24V CV Driver

L'azure constantly strives to improve our products using the latest technological advancements in the industry.  
Due to which the data mentioned in the data sheet is subject to change without prior notice.