

Willow Surface Wall S - #3071



6W




355lm



3000K





Asymmetric



Photometric Data

Light source	LED - High Power	Light output ratio	45%
Power (W)	6W	Color rendering index (Ra)	>92
Delivered lumens	355lm	Color rendering index (R9)	>50
Source lumens	786lm	Binning MacAdam	<3 SDCM
Colour temperature (K)	3000K	LED life	L90 B10 Tj75°C
Luminaire efficacy	59.17lm/W	UGR	<19
Beam angle	Asymmetric	Operating temperature	-20°C to +50°C
Cutoff angle	NA	Light distribution	Asymmetric

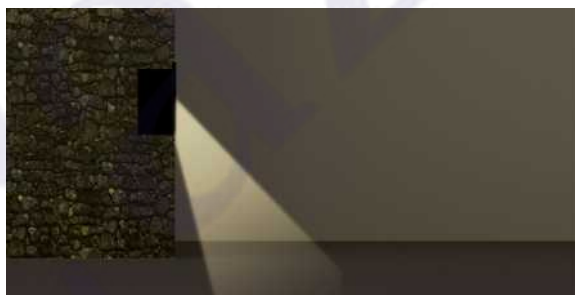

Technical Data

Mounting detail	Surface	Product weight	513gms
Fixing detail	Wall Mounted	Safety class	III
Orientation	Fixed	Insulation class	III
IP rating	IP65	Voltage	AC230V / DC24V
Glow wire test	850°	Driver	In-built - AC230V
Trim material	NA		Remote - DC24V
Heatsink material	Diecast alm.		

Photometric Graphs

Hue Bin vs Rf Graph



Color Vector Graph



Spectrum vs Wavelength Graph



CIE Chromaticity Graph



Finish Options

Body Finish

- Matt Grey
- Matt Black
- Custom RAL Color

Dimming Options



Constant Voltage Driver
36w DC24V
Non Dimmable



Constant Voltage Driver
36w DC24V
Triac Dimmable



Constant Voltage Driver
36w DC24V
Analog 0-10V / 1-10V Dimmable



Constant Voltage Driver
36w DC24V
Dali Dimmable